



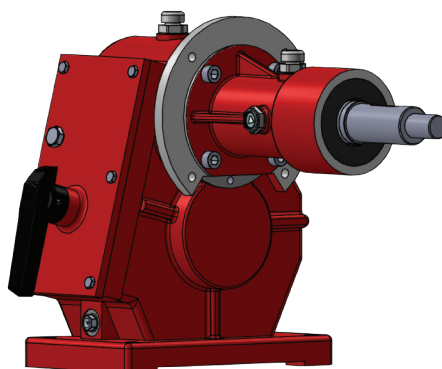

SCALA 1:2

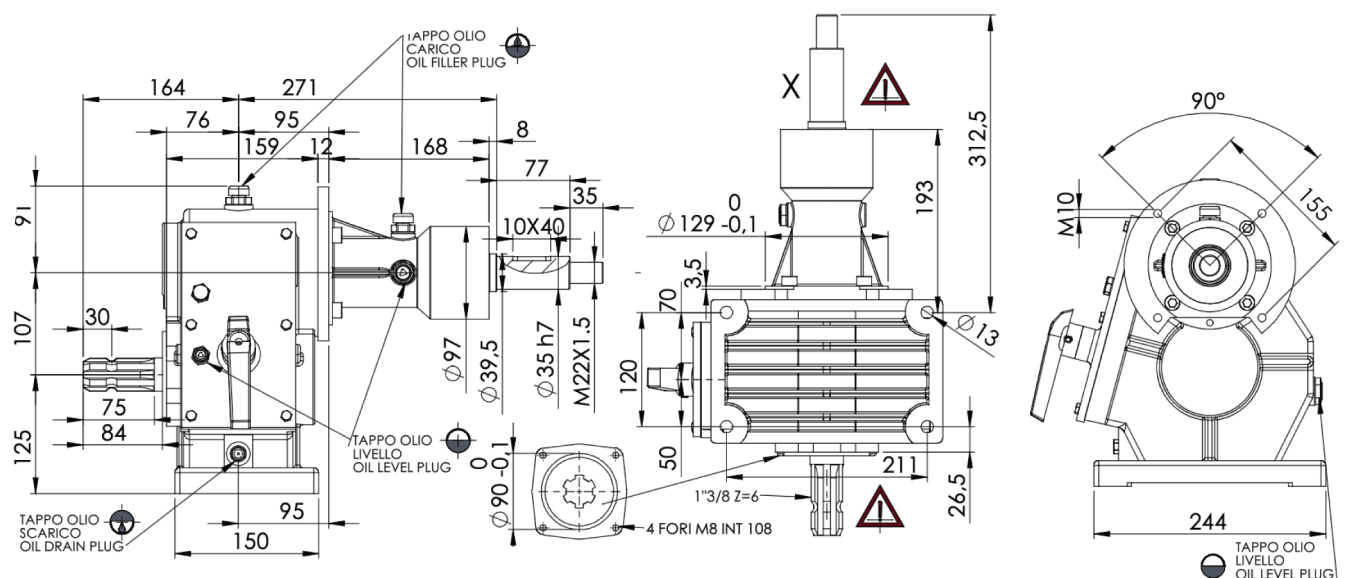

Alberi contrassegnati non sono protetti
Rotating shafts marked are not shielded

X = Alberi per ventola su richiesta del cliente
X = Fan shaft on request of customer

RAPPORTO RATIO	POTENZA POWER		GIRI xM ROTATIONxM min-1	COPPIA ENTRATA TORQUE INPUT N.m	COPPIA USCITA TORQUE OUTPUT N.m	GIRI xM OUTPUT min-1	MONTAGGIO ARRANGEMENT
	CV	KW					
1:3.1	45	33	540	590	185	1674	
1:3.6	45	33	540	590	159	1944	
1:4	45	33	540	590	143	2160	
1:4.4	48	35	540	625	138	2376	
1:5	48	35	540	625	121	2700	

OLIO OIL	PESO WEIGHT	SCATOLA BOX	INGRANAGGI GEARS	ELICOIDALI HELICOIDAL	LEVA CAMBIO VELOCITÀ SPEED CHANGE LEVER	CODICE CODE
SAE 150 Kg 1.6	Kg 36	G25	18NiCrMo5			ZMA107F



I gruppi vengono forniti senza olio; provvedere al riempimento fino al livello prima della messa in opera.
The units are supplied without oil; before use, fill to the correct level.