

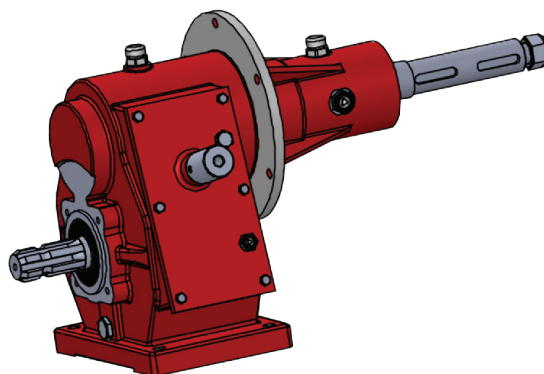


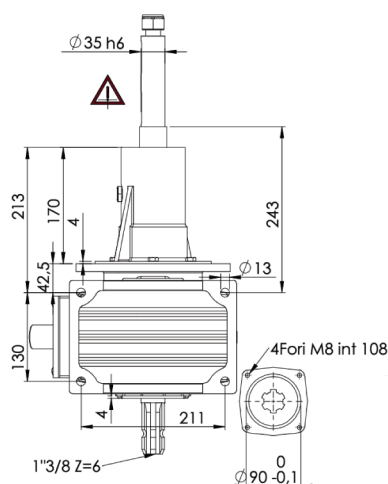

SCALA 1:2

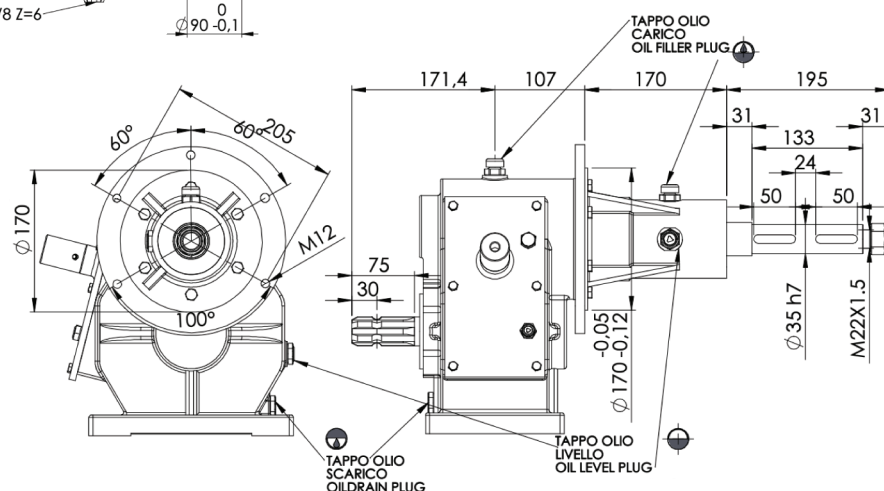

Alberi contrassegnati non sono protetti
Rotating shafts marked are not shielded

X = Alberi per ventola su richiesta del cliente
X = Fan shaft on request of customer

RAPPORTO RATIO	POTENZA POWER		GIRI xM ROTATIONxM min-1	COPPIA ENTRATA TORQUE INPUT N.m	COPPIA USCITA TORQUE OUTPUT N.m	GIRI xM OUTPUT min-1	MONTAGGIO ARRANGEMENT
	CV	KW					
1:3	59	43.4	540	785	254	1620	
1:3.5	59	43.4	540	770	213	1890	
1:4	61	44.8	540	800	194	2160	
1:4.5	61	44.8	540	800	172	2430	
1:5	61	44.8	540	800	155	2700	
1:5.5	61	44.8	540	800	141	2970	

OLIO OIL	PESO WEIGHT	SCATOLA BOX	INGRANAGGI GEARS	ELICOIDALI HELICOIDAL	LEVA CAMBIO VELOCITÀ SPEED CHANGE LEVER	CODICE CODE
SAE 150 Kg 1.8	Kg 43	G25	18NiCrMo5			ZMA110F



I gruppi vengono forniti senza olio; provvedere al riempimento fino al livello prima della messa in opera.
The units are supplied without oil; before use, fill to the correct level.