
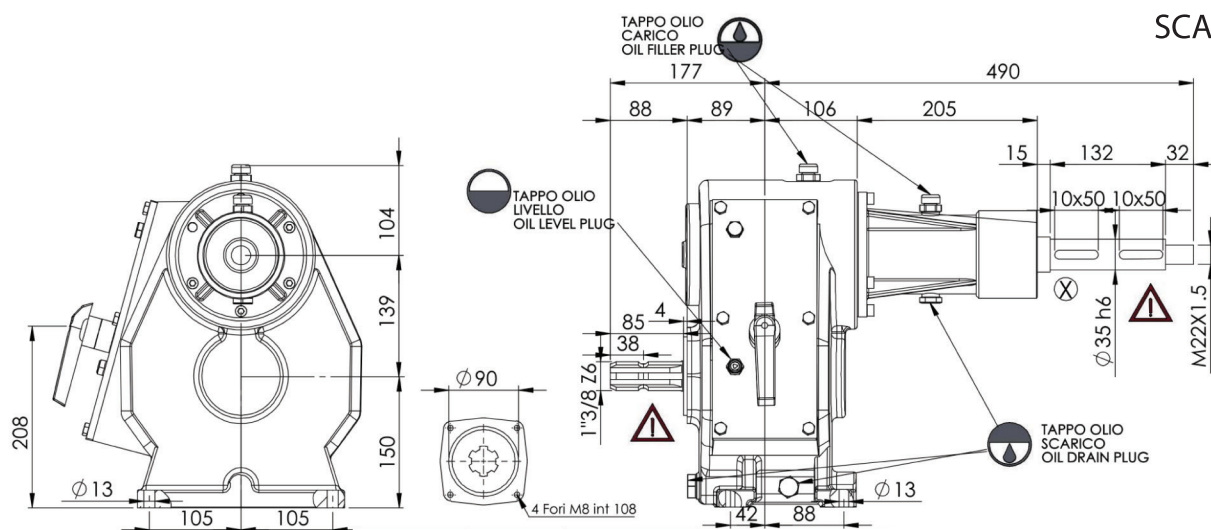


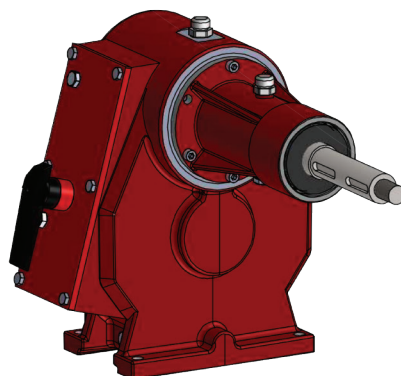

Alberi contrassegnati non sono protetti
Rotating shafts marked are not shielded

X = Alberi per ventola su richiesta del cliente
X = Fan shaft on request of customer

RAPPORTO RATIO	POTENZA POWER		GIRI xM ROTATIONxM min-1	COPPIA ENTRATA TORQUE INPUT N.m	COPPIA USCITA TORQUE OUTPUT N.m	GIRI xM OUTPUT min-1	MONTAGGIO ARRANGEMENT
	CV	KW					
1:3	75	55	540	975	315	1620	
1:3.5	75	55	540	975	270	1890	
1:4	75	55	540	975	236	2160	
1:4.5	75	55	540	975	210	2430	
1:5	75	55	540	975	189	2700	
1:6.8	75	55	540	975	139	3672	
1:7	75	55	540	975	135	3780	
1:7.5	75	55	540	975	126	4050	

OLIO OIL	PESO WEIGHT	SCATOLA BOX	INGRANAGGI GEARS	ELICOIDALI HELICOIDAL	LEVA CAMBIO VELOCITÀ SPEED CHANGE LEVER	CODICE CODE
SAE 150 Kg 3.5	Kg 53	GJ400-15 UNI EN1563	18NiCrMo5			ZMA139P



I gruppi vengono forniti senza olio; provvedere al riempimento fino al livello prima della messa in opera.
The units are supplied without oil; before use, fill to the correct level.