



MA139S

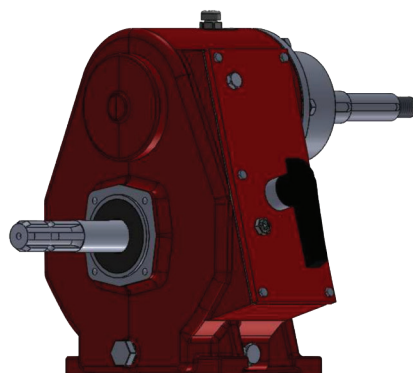

SCALA 1:2

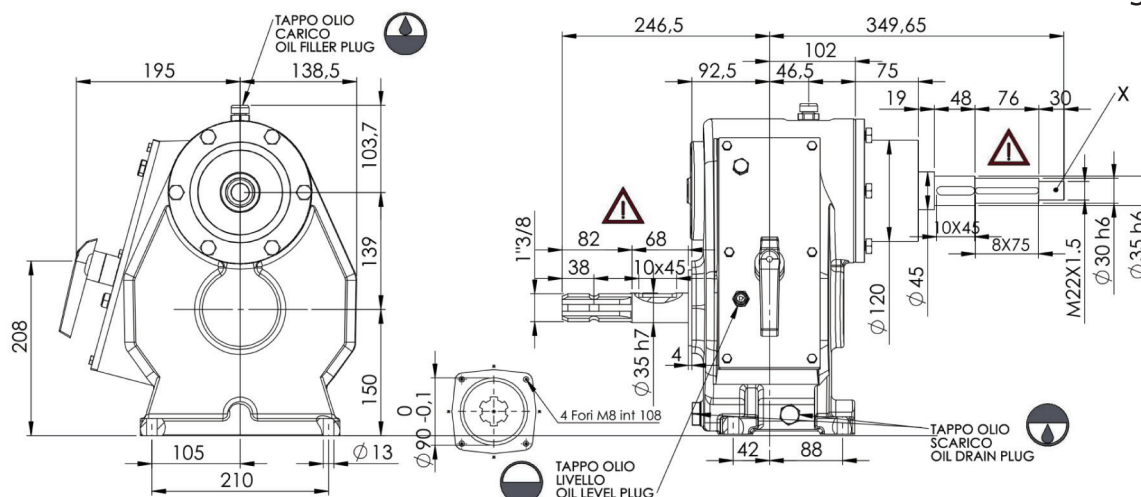

Alberi contrassegnati non sono protetti
Rotating shafts marked are not shielded

X = Alberi per ventola su richiesta del cliente
X = Fan shaft on request of customer

RAPPORTO RATIO	POTENZA POWER		GIRI xM ROTATIONxM min-1	COPPIA ENTRATA TORQUE INPUT N.m	COPPIA USCITA TORQUE OUTPUT N.m	GIRI xM OUTPUT min-1	MONTAGGIO ARRANGEMENT
	CV	KW					
1:3	80	58.8	540	1039	336	1620	
1:3.5	80	58.8	540	1039	288	1890	
1:4	80	58.8	540	1039	252	2160	
1:4.5	80	58.8	540	1039	224	2430	
1:5	75	55.1	540	974	189	2700	
1:6	75	55.1	540	974	157.4	3240	
1:6.8	75	55.1	540	974	138	3672	
1:7	75	55.1	540	974	135	3780	
1:7.5	75	55.1	540	974	126	4050	

OLIO OIL	PESO WEIGHT	SCATOLA BOX	INGRANAGGI GEARS	ELICOIDALI HELICOIDAL	LEVA CAMBIO VELOCITÀ SPEED CHANGE LEVER	CODICE CODE
SAE 150 Kg 3.5	Kg 52	GJ400-15 UNI EN1563	18NiCrMo5			ZMA139S



I gruppi vengono forniti senza olio; provvedere al riempimento fino al livello prima della messa in opera.
The units are supplied without oil; before use, fill to the correct level.