



MA86S

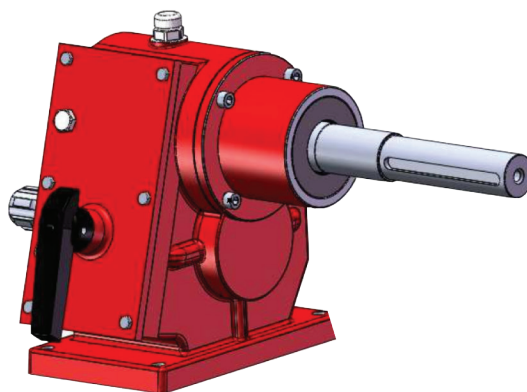

SCALA 1:2

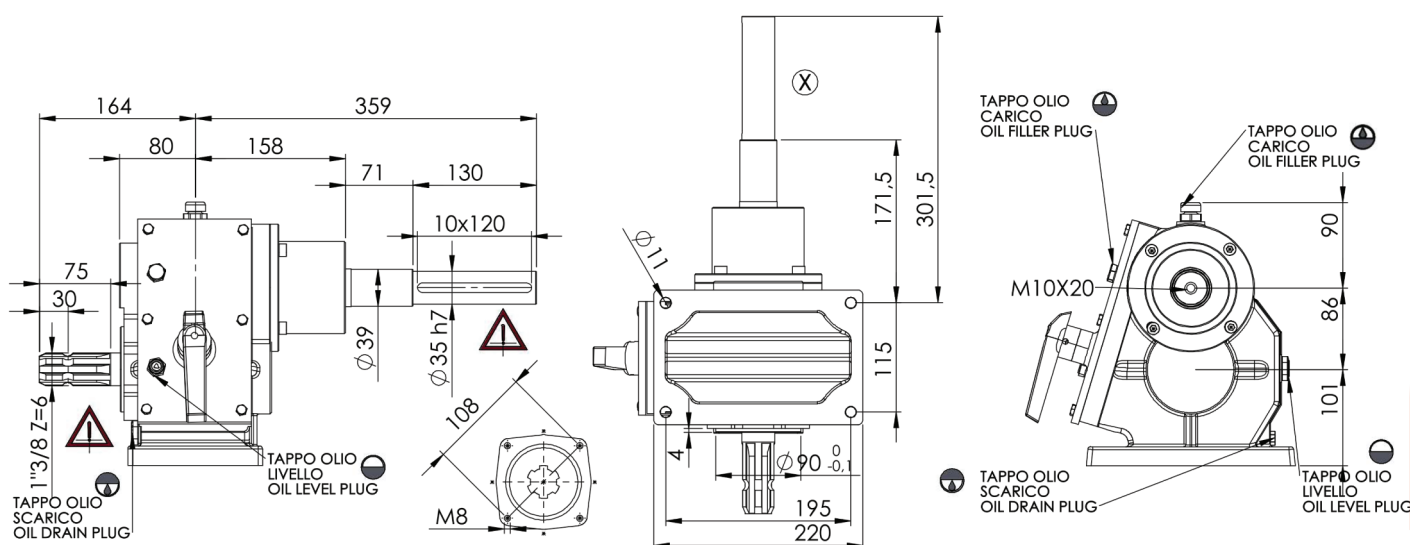

Alberi contrassegnati non sono protetti
Rotating shafts marked are not shielded

X = Alberi per ventola su richiesta del cliente
X = Fan shaft on request of customer

RAPPORTO RATIO	POTENZA POWER		GIRI xM ROTATIONxM	COPPIA ENTRATA TORQUE INPUT	COPPIA USCITA TORQUE OUTPUT	GIRI xM OUTPUT	MONTAGGIO ARRANGEMENT
	CV	KW	min-1	N.m	N.m	min-1	
1:2.55	28	20.6	540	368	143	1377	
1:3.12	30	22	540	395	125	1684	
1:3.7	30	22	540	395	101	1844	
1:4	30	22	540	395	98	2160	
1:4.5	30	22	540	395	87	2430	
1:5	30	22	540	395	78	2700	

OLIO OIL	PESO WEIGHT	SCATOLA BOX	INGRANAGGI GEARS	ELICOIDALI HELICOIDAL	LEVA CAMBIO VELOCITÀ SPEED CHANGE LEVER	CODICE CODE
SAE 150 Kg 1.5	Kg 25	G25	18NiCrMo5			ZMA86S



I gruppi vengono forniti senza olio; provvedere al riempimento fino al livello prima della messa in opera.
The units are supplied without oil; before use, fill to the correct level.